

# Jabra TAG



**USER MANUAL** 

**GN** Netcom

#### CONTENTS

WELCOME	
JABRA TAG OVERVIEW	
CONNECTING	
USING THE JABRA TAG	
SUPPORT	.11
TECHNICAL SPECIFICATIONS	.14

## WELCOME

Thank you for purchasing the Jabra Tag. We hope you enjoy it!




#### WHAT YOUR JABBA TAG CAN DO

- · Answer, end, reject\* and mute calls.
- Redial last number dialled\*
- · Call waiting\*.
- · Voice dialling\*.
- Voice guidance for pairing instructions, battery status and connection status.
- Play music and get GPS instructions via your connected mobile device.\*
- · Connect to two mobile devices simultaneously.

<sup>\*</sup> Phone dependent

## JABRA TAG OVERVIEW

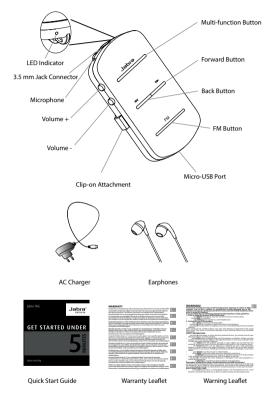

#### WEARING THE JABRA TAG

The Jabra Tag has two different wearing styles.


#### Around the neck

Create a loop using the headphone cables, and wear around the neck. Adjust the length of the cable by moving the clip on the wire either up or down.




#### Clip-on

Clip the Jabra Tag to your clothing using the clip-on attachment.



#### PLUGGING IN THE EARPHONES

Plug in the earphones, as illustrated. To unplug, firmly grip the Jack Connector and pull. Do not pull using the cable.




#### TURNING THE JABRA TAG ON/OFF

Press and hold (4 secs) the **Multi-function** button to turn the Jabra Tag on or off.



#### CHARGING THE JABRA TAG

Connect the Jabra Tag to the power charger and insert into an available power outlet. It takes approximately 2 hours to fully charge.



6

## CONNECTING

#### FIRST TIME PAIRING

- Turn on the Jabra Tag. (Press and the Multi-function button for 4 seconds).
- 2. Activate Bluetooth on your mobile phone, and select Jabra Tag. If asked for a PIN code, enter 0000 (4 zeros).

**Note**: When the Jabra Tag and a mobile phone have been paired they will automatically connect whenever the Jabra Tag is switched on, and the mobile phone has bluetooth activated and is within range (10 m).



#### PAIRING WITH ANOTHER MOBILE PHONE

- 1. Turn off the Jabra Tag (Press and hold the **Multi-function** button for 4 seconds).
- Press and hold (4 secs) the **Multi-function** button until the LED indicator flashes blue.
- Activate Bluetooth on your mobile phone, and select Jabra Tag. If asked for a PIN code, enter 0000 (4 zeros).



<sup>\*</sup> Phone dependent

## USING THE JABRA TAG

#### USING WITH YOUR MOBILE PHONE

	On/off	Press and hold (4 secs) the <b>Multi-function</b> button to turn the  Jabra Tag on/off
Jabra	Play/pause music *	Music played on your mobile phone will automatically transfer. To pause music tap the <b>Multi-function</b> button. To resume music tap the <b>Multi-function</b> button again
	Make call*	Calls made on your mobile phone will automatically transfer. If not, tap the <b>Multi-function</b> button
	Answer call*	Tap the <b>Multi-function</b> button
	End call*	Tap the <b>Multi-function</b> button
	Reject call*	Double-tap the <b>Multi-function</b> button
	Redial last number	Double-tap the <b>Multi-function</b> button
+	Speaker volume up/ down*	Tap the <b>Volume up</b> or <b>Volume down</b> button
-	Mute/un-mute microphone*	Press the <b>Volume Up</b> and <b>Volume Down</b> buttons simultaneously
H4/>>	Skip music tracks, or FM channel search	Tap the <b>Forward</b> or <b>Back</b> button to skip through music tracks, or to search through FM channels (when FM radio mode is enabled)
FM	FM radio mode	Tap the <b>FM</b> button, and then press the <b>Forward</b> or <b>Back</b> button to search for the next available FM channel.
	Save current FM channel	Double-tap the <b>FM</b> button
	Switch between saved FM channels	Press and hold the <b>FM</b> button until a sound is played.

<sup>\*</sup> Phone dependent

#### USING WITH TWO MOBILE PHONES

The Jabra Tag can accept and handle calls between two connected mobile phones.

	End current call and answer incoming call	Tap the <b>Multi-function</b> button
Jabra	Reject incoming call	Double-tap the <b>Multi-function</b> button
	Put current call on hold and answer incoming call	Press (2 secs) the <b>Multi-function</b> button
	Switch between held call and active call	Press (2 secs) the <b>Multi-function</b> button

## WHAT THE LIGHTS MEAN

What you see (press play to view)	What it means
	Power on
	Power off
	The Jabra Tag is powered on, but not connected to a mobile phone (standby mode)
	The Jabra Tag is in pairing mode, and ready to connect
	A mobile phone is Bluetooth connected to the Jabra Tag

Incoming call
Active call
Battery is charging
Battery is fully charged
Low battery
DFU/Firmware upgrade mode

## SUPPORT

#### FAO

#### Q I hear crackling noises

A Bluetooth is a radio technology that is sensitive to objects between the Jabra Tag and the connected device. Ensure the Jabra Tag and the connected device are within 33 feet (10 meters) of each other, with no major objects in the way (walls, etc.).

#### Q I cannot hear anything

- A Increase the speaker volume.
  - Ensure that the Jabra Tag is paired to a device that is playing.
  - Make sure your phone is connected to the Jabra Tag by tapping the **Multi-function** button.

#### Q I am having pairing problems

A You may have deleted your Jabra Tag pairing connection to your mobile phone. Follow the pairing instructions again.

#### Q Will the Jabra Tag support other Bluetooth equipment?

A The Jabra Tag is designed to work with Bluetooth mobile phones. It can also support other Bluetooth devices that are compliant with Bluetooth version 1.1 or higher and support a headset, hands-free and/or advance audio distribution profile.

#### Q I cannot use Reject call or Redial

A These features require your mobile phone to support a handsfree profile. Refer to your mobile phone user manual for more details.

## Q I have problems streaming in stereo from my music device (mobile phone, PC, MP3-player etc.)

A Make sure the other device supports Bluetooth 1.1 or 1.2 including the Advanced Audio Distribution Profile (A2DP), otherwise it will not work. Please consult the user manual of the device you are using for how to pair it to a Bluetooth Stereo headset.

#### HOW TO CARE FOR YOUR JABRA TAG

- Always store the Jabra Tag with the power off and safely protected.
- Avoid storage at extreme temperatures (above 45°C/113°F or below -10°C/14°F). This can shorten battery life and may affect operation. High temperatures may also degrade performance.
- · Do not expose the Jabra Tag to rain or other liquids.

#### NEED MORE HELP?

Web: www.jabra.com/tag

#### E-mail:

Deutsch	support.de@jabra.com
English	support.uk@jabra.com
Español	support.es@jabra.com
Français	support.fr@jabra.com
Italiano	support.it@jabra.com
Nederlands	support.nl@jabra.com
Polska	support.pl@jabra.com
Scandinavian	support.no@jabra.com
Россия	support.ru@jabra.com
Australia	support.au@jabra.com
China	support.cn@jabra.com
Japan	support.jp@jabra.com
New Zealand	support.nz@jabra.com
Singapore	support.sg@jabra.com

#### Phone:

Belgique/Belgie	+32 28080766
Danmark	+45 69918794
Deutschland	+49 30896778991
Suomi	+45 35256540
France	+33 182880251
Italia	+39 0662207674

Luxembourg +45 35256540 Nederland +31 208080962 Norae +47 22577785 Österreich +43 720880558 Portugal +45 35256540 Россия +7 916 246 69 00 Sverige +46 852507012 Die Schweiz +41 435002460 España +34 911875539 United Kingdom +44 2033180070 Australia 1-800-738-521 China 800-858-0789 Japan 03-3242-8722 Singapore 800-101-2329 **United State** 1 (800) 327-2230 1 (800) 489-4199 Canada International +45 35256540

## TECHNICAL SPECIFICATIONS

#### Weight:

30 grams

#### **Dimensions:**

L 56.0 mm x W 34.5 mm x H 8.3 mm

#### Microphone:

4 mm Omni-directional microphone

14 dB +/- 3 dB

#### Speaker:

32 Ohm, 5 dB +/- 3 dB

#### Operating range:

Up to 10 meters (33 feet)

#### **Bluetooth version:**

3.0

#### Paired devices:

Can be connected to two Bluetooth devices at the same time

#### **Supported Bluetooth profiles:**

Hands Free profile (v. 1.6), Headset profile (v. 1.2), A2DP (v. 1.2),

AVRCP (v. 1.4)

#### Talk time:

Up to 8 hours

#### Standby time:

Up to 8 days

## Charging time:

Approximately 2 hours

## AC power supply:

100 - 240 V, 50 - 60 Hz

#### **Charging plug dimensions:**

5 pin micro-USB, L 5.0 mm x W 8.7 mm x H 2.4 mm

#### Operating temperature:

-10° C to 65° C (14° F to 149° F)

#### Storage temperature:

0° C to 45° C (32° F to 113° F)

#### Pairing passkey or PIN:

0000

#### Materials:

Body (housing, frame buttons): PC+ABS

Clip: POM

Light guide: PC

## Metal: SUS304, S304

## Warranty:

One year limited warranty



Dispose of the product according to local standards and regulations. www.jabra.com/weee

.



#### A BRAND BY

## GN Netcom

© 2012 GN Netcom US, Inc. All rights reserved. Jabra® is a registered trademark of GN Netcom A/S. All other trademarks included herein are the property of their respective owners. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by GN Netcom A/S is under license. (Design and specifications subject to change without notice).

© 2012 GN Netcom A/S. All rights reserved. Jabra® is a registered trademark of GN Netcom A/S. All other trademarks included herein are the property of their respective owners. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by GN Netcom A/S is under license. (Design and specifications subject to change without notice).

MADE IN CHINA





